




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : C10J 3/02, 3/26	A1	(11) International Publication Number: WO 99/35214 (43) International Publication Date: 15 July 1999 (15.07.99)
(21) International Application Number: PCT/IB99/00001 (22) International Filing Date: 5 January 1999 (05.01.99) (30) Priority Data: 0035/98 9 January 1998 (09.01.98) CH (71) Applicant (for all designated States except US): GREEN-POWER ENGINEERING & TECHNOLOGIES S.A. [CH/CH]; CH-6986 Curio (CH). (72) Inventors; and (75) Inventors/Applicants (for US only): JACCARD, Ldon [CH/CH]; Gradisetta, CH-6986 Curio (CH). JACCARD, Jean, Patrick [CH/CH]; Gradisetta, CH-6986 Curio (CH). (74) Agent: SPANDONARI, Carlo; Spandonari & Modiano s.r.l., Corso Duca degli Abruzzi, 16, I-10129 Torino (IT).		(81) Designated States: AL, AU, BA, BB, BG, BR, CA, CN, CU, CZ, EE, GE, HR, HU, ID, IL, IS, JP, KP, KR, LK, LR, LT, LV, MG, MK, MX, NZ, PL, RO, SG, SI, SK, TR, UA, US, VN, YU, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.

(54) Title: A PROCESS AND APPARATUS FOR TREATING SOLID FUEL MATERIALS

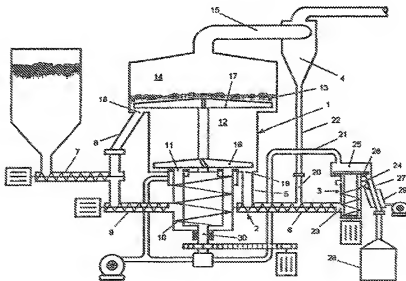

(57) Abstract

Solid fuels, such as contaminated biomass and solid city waste, are converted into a synthesized gas by gasification and exploitation of the energy contained in the fuels. The fuel is gasified in a co-current gasogen (1), while the cinders are separated, removed and purified after a fraction of the fuels has undergone combustion and before the fuel has been gasified. Cinder purification is made by complete combustion, while the fuel that has undergone the gasification step without being completely transformed in CO is recirculated by mixing it to fresh fuel material. The process is carried out in an apparatus comprising a vertical co-current gasogen (1) and a device for the separation and removal of cinders (16, 19, 5, 6) as well as a scorification chamber (3) where cinders are purified from accompanying fuel material by complete combustion and are then collected in a waste tank (28).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

"A process and apparatus for treating solid fuel materials"

This invention is concerned with a process for treating solid fuels, such as contaminated biomass and solid city waste, and for converting them into a synthesized gas by gasification carried out in a co-current gasogen. The invention is also concerned with an apparatus for carrying out the process.

Several processes are known in the practice and the patent literature for treating solid fuel materials, and particularly contaminated biomass and solid city waste, by transformation of the fuel materials into a synthesized gas, from which energy is then retrieved in different ways, e.g. directly in form of heat energy, or indirectly by generation of electric power.

According to a process disclosed in detail, for instance, in EP-0 663 433, the fuel is first compacted in a tubular channel of preferably circular cross-section, then thermally treated by a process of gasification and pyrolysis, with generation of a synthesized gas in the tubular channel, and the carbonized material, after the above heat treatment, is finally submitted to complete combustion at the end of the channel in a counter-current gasogen. In this known approach, cinders are separated only after complete combustion in the counter-current gasogen, due to the circumstance that the cinders are collected on the bottom of the gasogen, and then fall down onto a water bed acting as a sealing buffer to prevent gas exchanges between the gasogen and the outside environment.

The above known approach has two main disadvantages. On the one hand, it is very difficult to have a sufficiently large gasification chamber, such that the necessary gasification step can be completed, this step consisting in the transformation of CO_2 , as developed in the partial combustion of a fraction of the material, into the CO synthesized gas, as is the object of the invention. As a matter of fact, the annular gasification chamber should, if its aim is to be attained, take an excessive length, with considerable, and possibly unsurmountable, constructive problems. On the other hand, cinders are separated and removed only after the complete combustion of the material in the counter-current gasogen has taken place, so that the cinders contaminate every step in the gasification process. It is apparent that it would be advantageous to separate the cinders from the fuel as soon as possible, so that the operating steps can be more easily governed or controlled.

According to another known solution for a co-current gasogen, as published in EP-0 565 935, a vertical, co-current gasogen comprises a combustion area for a fraction of the material, having an annular shape, where the oxidant is fed from both the inner and/or outer sides, and a gasification chamber for the remaining
5 material, which again is vertical and arranged above and downstream of the combustion area, in the direction of displacement of the material.

This approach does in fact afford optimal conditions of gasification, inasmuch as it allows gasification chambers of practically unlimited extension to be built, so as to insure complete transformation of the CO₂ generated into CO. Moreover,
10 this solution also provides for recirculating the material that has undergone the gasification step without being completely converted into the synthesized gas. Such recirculation consists in allowing the above material to overflow laterally at the end of the gasification chamber and to drop laterally within the gasogen to mix with the fresh material at the bottom. However, this solution is not suitable
15 for use in the gasification of solid fuel materials producing cinders during combustion, such as contaminated biomass and solid city waste, because it lacks a device for separating, removing and purifying the cinders, which will therefore remain in the gasogen and eventually clog it.

The object of the present invention is therefore to provide a process and an
20 apparatus for treating fuel materials to convert them into a synthesized gas by gasification in a co-current gasogen, which can avoid the above drawbacks of the prior art and which can insure conditions of treatment of solid fuel materials, particularly contaminated biomass and solid city waste, giving rise to optimal cinders. In other words, the process should meet all rules in force concerning
25 protection of air and water, and should be perfectly governable and controllable, so that the apparatus can operate without interruption for long periods of time.

The above object is attained with a process for treating solid fuel materials, comprising a gasification step of the material in a co-current gasogen, according to the preamble of claim 1, having the features recited in the characterizing part of
30 claim 1.

The invention also concerns an apparatus for carrying out the process according to the preamble of claim 10 and having the features recited the characterizing part of claim 10.

Dependent claims 2 to 9 concern preferred embodiments of the inventive process, and dependent claims 10 to 14 concern preferred embodiments of the apparatus for carrying out the inventive process, its advantages appearing more distinctly in the following disclosure of a preferred embodiment of the invention.

- 5 The invention will now be further described with reference to an example of the apparatus concerned, shown diagrammatically on Fig. 1.

General description of the invention

The invention comprises two main units:

- 10 • a vertical co-current gasogen 1, similar, in its main components, to the gasogen disclosed in EP-0 565 935, to which is here made specific reference.
- a system 2 for separating and removing "cinders" arising within the gasogen, and an associated, though geometrically distinct, device 3 for purifying the cinders.

- 15 The term "cinders" is used to refer to all matter which is contained in the fuel supplied to the gasogen and which is incombustible and consequently not gasifiable. The mass percentage of cinders in the fuel can vary in a wide range: generally in the range 0 to 50%.

- 20 The cinders may originate directly from the removal carried out within gasogen 1, or they may be part of the dusts retained in the several purification modules for the synthesized gas (cyclone filters, cloth filters, electrostatic filters). The material with a high cinder content is conveyed, through a suitable duct, to purifying device 3, also called scorification chamber. In this chamber, the material is suitably treated so that only inert matter is obtained a final product.

- 25 A connection duct 5 leading from gasogen 1 to scorification chamber 3 is provided with a suitable material-conveying system 6, which, depending on the geometrical relationship between the two main units, may consist in a horizontal auger 6 as shown, or in an inclined auger, or in a simple inclined chute, possibly of the vibrating type.

- 30 The inventive gasogen is of the kind having a recirculating bed, the flows of gas and of solid matter being co-current and oriented vertically. The heat required by

the process is supplied by the combustion of a predetermined fraction of the fuel supplied. The oxidant required for partial combustion may be, depending on circumstances, plain air, air enriched with oxygen, or pure oxygen. In any case, particularly where air is used, the oxidant is pre-heated to a temperature above 400°C, by using a fraction of the available heat contained in the synthesized gas coming out from gasogen 1 at a high temperature (650 to 700 °C). Pre-heating allows the PCI of the gas to be increased, while improving combustion at the same time.

If necessary, in order to increase the synthesis of gas molecules with high hydrogen content (H_2 , hydrocarbons), a mixture of oxidant and overheated steam may also be used.

The gasogen can operate either at atmospheric pressure or at higher pressures, in the range of a few tens of bars, so that the synthesis of hydrocarbons is promoted (particularly CH_4).

The fresh fuel material fed by auger 7 is mixed to the carbon resulting as a residue of gasification and emerging from duct 8, and is then propelled into the gasogen by injector auger 9. Within gasogen 1, a vertical auger 10 distributes the mixture uniformly over an extended, though narrow, annular surface, while, at the same time, lifting the mixture to the combustion area 11.

Until this time, the flows considered have only been submitted to physical operations. Chemical reactions start when the material reaches the immediate neighborhood of the annular combustion area 11. The oxidant atmosphere required for combustion is generated by blowing oxidant from the outside and from the inside of annular area 11. Combustion chamber 11 may be entirely built in a metal resistant to high temperatures, or it may have parts of ceramic or refractory material, which will insure a long lifetime, particularly where pure oxygen is used as an oxidant in the process. Ceramic parts, or parts of a similar material, allow the process temperature to be increased, because they reduce the heat loss by conduction through metal walls. This helps the gasification process.

Under the action of high temperature, which is also favored by the physical concentration of the combustion, and of the oxidant atmosphere prevailing in that area, the material undergoes a number of chemical reactions, leading to the formation of gas and carbon (mainly pyrolytic and combustion reactions). The gas and carbon so generated move towards the top of gasification chamber 12,

crossing carbon bed 13 located there. During their passage, the pyrolysis/combustion gas and the carbon react together chemically and physically until a final product is obtained which comprises the synthesized gas proper and the residual carbon that has not reacted. The synthesized gas emerges from carbon bed 13 and collects within rest chamber 14 (with the purpose of smoothing gas removal and of decanting a part of the suspended particulate) which in turn leads to gas outlet duct 15. The residual carbon is collected by gravity in duct 8 to undergo a fresh gasification cycle. A portion of the cinders contained in the fuel is removed through duct 5 and is processed separately in scorification chamber 3.

- 10 The central shaft in the gasification chamber, which is integral with the rotating vertical auger, is provided, at its bottom and top ends, with respective shovels 16 and 17, having the function of material distributors.

Lower shovels 16 are arranged turbine-like, i.e. with surfaces forming an angle to the vertical direction. As the shaft rotates, shovels 16 and 17 push the surrounding material upwards, and leave a small empty cavity on their lower sides along the entire shovel lengths. The empty cavity is invaded by the gas formed in the underlying combustion and pyrolysis, which, in the absence of any substantial resistance, will be distributed radially over the entire surface. Shovels 16 and 17 have thus the task of distributing the combustion-pyrolysis gas over the entire surface of chamber 12 and, since there is a relative motion between the shovels and the material, they also prevent the formation of preferential channels in the passage of the gas. As it will appear below, shovels 16 also have the function of helping separation between carbon and inert cinders, so that the amount of fuel material to be treated in scorification chamber 3 is reduced. Upper shovels 17 are arranged horizontally and have merely the task of conveying the excess carbon toward recirculation port 18.

Definition of flows within the gasogen

During operation of the apparatus, a hierarchy of the rated flow rates of the several augers should at all times be maintained:

- 30 rated flowrate in vert. auger 10 > rated flowrate in injector auger 9 > flowrate in supply auger 7

The flow rates through vertical auger 10 and injector auger 9 are merely nominal, as vertical auger 10, for instance, will convey at any given time only what it receives from injector auger 9. In this case the flow rate through vertical

auger 10 would be equal to the flow rate through injector auger 9. Similarly, injector auger 9 will convey at any given time the flow rate of supply auger 7 plus the flow rate of the recirculated carbon. The balance of the flow rates is achieved due to the variations of their efficiencies.

- 5 This hierarchy is imposed in order to prevent clogging between the several augers, which would have serious consequences for the mechanics and the operation of the apparatus.

An important peculiarity of the inventive gasogen is the recirculation of the carbon that has not reacted during gasification. The recirculation of a fraction of
10 the carbon is already known from EP-0 565 935 mentioned above, but the recirculation there is distinguished from the present invention because of the substantial difference between the beds in the respective configurations.

The advantages of recirculation are several:

- The recirculating carbon (having a substantially homogeneous chemio-
15 physical composition) mixes with the fresh fuel before entering the gasogen, thus improving the homogeneity of the physical and chemical characteristics of the material reaching the combustion area, and consequently stabilizing that area.
- The recirculating carbon reaching the combustion area, which is dry, hot and of a low grading, tends to burn before the fresh fuel with which it is mixed. This
20 leads to a saving of a part of the pyrolyzed gas developing from the fuel, which would otherwise be burned in this oxygen-rich area.
- The carbon acts as a filter and catalyst with respect to several substances, among which are tars. Since the bed recirculates, each passage through the combustion area regenerates the specific properties of the carbon, which would
25 otherwise be progressively lost.
- The gasification chamber holds a bed comprising mainly carbon and inert matter. Since the separation and removal device is unable to remove the totality of inert matter, the recirculation prevents it from accumulating within the bed and progressively reduce the amount of carbon that can react and consequently
30 also the efficiency of the gasification reactions. Due to recirculation, inert matter is brought to the neighborhood of the cinder removal port 19, and its rate within the carbon bed is maintained constant.

The amount of recirculating carbon is regulated by adjusting the ratio between the flow rates through supply auger 7 and through injector auger 9. The larger the flow rate through injector auger 9 with respect to the flow rate through supply auger 7, the more carbon will be recirculated. Consequently, the material reaching the combustion area will have a higher rate of carbon and a lower rate of fresh fuel.

The power developed in the gasogen is regulated by adjusting the flow rate of injected fuel. An increase in the oxidant flow rate will give rise to an increase in the output power generated by the gasogen, and vice-versa for a reduction. It is obvious that to a power variation of the gasogen will correspond a variation of the flow rate of the fuel in the same direction; this will give rise, consequently, to a variation of flow rate in supply auger 7.

It should be noted that supply auger 7 is preferably not controlled by an operator directly, but rather it is governed by the level detector placed at the top of the carbon bed (not shown). This will provide to keep the carbon level at a height that is always slightly above the height of the recirculation port.

Scorification chamber 3

The first step in the process of removal of inert matter or cinders contained in the fuel takes place within gasogen 1, and more particularly on the bottom of gasification chamber 12. Due to the relative motion between lower shovels 16 and the material, a sort of scrambling of the material is obtained. By taking advantage from the difference in density and size grading of carbon and cinders, the latter can be made to settle (or "decant") on the bottom of chamber 12. The rotary motion of shovels 16 then pushes the cinders toward the removal port 16, where they are then removed.

Gasogen 1 and gasification chamber 12 are two physically quite distinct devices. Communication between them takes place in form of material removed from gasogen 1 and conveyed to scorification chamber 3 and in the form of combustion gas generated in scorification chamber 3 and reintroduced to gasification chamber 12 of gasogen 1.

As already mentioned above, the transport of the material can take place through a horizontal or inclined auger 6, by chute along an inclined duct, or through any

other transport device which is able to operate at a high temperature and which is able, at the same time, to insure a complete seal.

During the transfer from gasogen 1 to scorification chamber 3, connections are also preferably provided with other transport systems 20, which, for instance, convey dusts coming from the gas filtering device. It is thus possible to reduce solid emissions from gasogen 1 to the mere inert matter coming from scorification chamber 3.

Operation of the scorification chamber

The material reaching the scorification chamber 3 comprises a substantial fraction of inert material and a less substantial fraction of carbon, which is inevitably conveyed with the cinders.

The task of scorification chamber 3 is to purify the above heterogeneous mixture, so that its outlet delivers cinders only. This step raises the overall efficiency of the apparatus and avoids the loss of the chemical energy inherent to the carbon, which would otherwise be wasted. Moreover, the amount of cinders produced in the gasogen is reduced to a minimum.

Cinder purification is achieved by blowing a metered amount of oxygen into scorification chamber 3 (in form of plain air, enriched air or pure oxygen), so that the carbon therein is completely burned. Oxygen may be derived off the primary air circuit of the gasogen, or it may be supplied by a fully independent air circuit. Gas produced by the combustion of the material, comprising almost exclusively CO_2 , a CO fraction and possibly N_2 (when using air as an oxidant), is, e.g., subsequently added, through pipe 21, to the oxidant used in the combustion of a fraction of the material, so that it is partially reconverted to CO by exploiting the "purifying" properties of the carbon bed at the same time. In order to avoid disturbing the composition of the synthesized gas produced in gasogen 1, due, for instance, to the introduction of excessive and unnecessary amounts of oxygen and nitrogen, and in order to avoid removal of carbon-containing material from scorification chamber 3, the oxidant blown into the scorification chamber should be as far as possible in the required stoichiometric ratio.

The material comprising carbon and inert residue, emerging from gasogen 1 through pipe 8 and/or coming from the gas filtering device 4 through pipe 22,

reaches scorification chamber 3 through auger 6. This material is then engaged by auger 23 (which has a rated capacity larger than auger 6) and conveyed to annular combustion area 24, where, due to air blowing to the outside periphery and to the high temperature, carbon combustion takes place. The combustion can proceed, if necessary, as far as distribution chamber 25. Combustion area 24 and distribution chamber 25 are preferably built in a metal resistant to high temperatures or in a ceramic or refractory material.

The combustion gas is extracted through pipe 21 for reintroduction into gasification chamber 12. The spent cinders, on the other hand, are engaged by shovels 26, which are integral with the upper end of auger 23, and are swept off through a chute 27 into a storage tank 28. It should be noted that the oxidant necessary for combustion in the scorification chamber 3 may be heated in heat exchanger 29, thus exploiting the heat contained in the hot cinders. This will cool the cinders, thus reducing the heating problems in the storage tank placed downstream and increasing the overall efficiency of the apparatus. Any sensors required for process control are placed at the inlet of chute 21 (not shown).

It should be noted that the material flow removed from the gasogen determines the percentage of cinders in the carbon bed: the larger the flow, the less cinders will be present in gasification chamber 12. On the other hand, the higher is the flow of removed material, the more carbon is contained in it.

The simplest way to manage the operation of scorification chamber 3 is to set a fixed value for the material flow through auger 6 and an associated value for the oxidant flow, so that the stoichiometric ratio is approached. These values can be established by means of tests made on the apparatus during operation and then refined with operating practice.

A more accurate way of managing scorification chamber 3, which, however, requires suitable sensors, is to regulate the flow of oxidant blown in. If the stoichiometry of the combustion is to be satisfied, the oxidant flow rate corresponds to a given carbon flow rate. The material flow rate, which also contains cinders, is therefore determined as a function of the prescribed oxidant flow rate and of the carbon content in the material.

The stoichiometry of combustion can be evaluated mainly in two ways: analysis of the O₂ content in the combustion gas and/or analysis of the temperature of the combustion fumes. Through analysis of the presence of oxygen in the fumes, any

shortage or excess of fuel can be determined, and consequently an insufficient or excessive flow rate through auger 6.

Management by analysis of the fume temperature requires preliminary tests made on the operating apparatus, in order to determine the temperature as a function of excesses or shortages in the flow rate of the waste material. After this determination has been made, a comparison of the real fume temperature with the table of experimental values will show which adjustments should be made to the auger flow rate.

In summary, the most important features in the present invention are as follows:

a) Concerning the gasogen proper:

- A fraction of the carbon bed is recirculated.
- The recirculating carbon is mixed to the fresh fuel before reaching combustion area 11.
- Recirculation takes place outside the main gasogen structure.
- The recirculation rate, as well as the material flow rate through combustion area 11 is managed by adjusting the flow rate of injector auger 9: vertical auger 10 has just to convey all the material received.
- The power of the apparatus is adjusted by changing the primary oxidant flow rate. Fuel consumption is adjusted by controlling the flow rate in the supply auger.
- Turbine-like shovels 16, integral with central shaft 30, homogeneously distribute the combustion gas over the entire surface of the bed, and avoid formation of preferential flow channels through the bed. Shovels 16 also help inert matter contained in the fuel to settle on the bottom of the gasification chamber and push the inert matter toward the removal outlet 19.
- Ceramic or similar parts are preferably installed in hot areas, in order to increase the process temperature, improve gasification and prolong the lifetime of such areas.

b) Concerning scorification chamber 3:

- The scorification chamber 3 is physically distinct from gasogen 1, and communicates with it through cinders removal auger 6 and pipe 21, which blows the combustion gas in.
- 5 • It can handle flows having a high cinders content, originating from gasogen 1 and from the gas-filtering device 4, by means of a number of connections such as 8, 22 leading into cinders removal duct 6.
- It gives rise to a solid waste comprise only inert matter, with maximum reduction of its quantity and an improved overall efficiency of the apparatus.
- 10 • It does not generate emissions, because the combustion fumes are added to the oxidant and are reintroduced into combustion chamber 11, where they have a further chance to participate in the specific chemical reactions a draw a benefit from the purifying properties of the carbon bed.
- Combustion chambers 11 or 24 may be built in ceramic or in a similar
15 material.

The inventive process and apparatus can be applied in the heating treatment of any organic matter, in the widest meaning of the word (including matter of natural origin as well as matter of chemical origin, such as the several hydrocarbons, plastics, rubber, etc.), even if they contain substantial amounts of inert, and therefore incombustible, matter (as high as 50%). The peculiar mechanical
20 structure has the ability to treat fuels of different sizes and shapes. More particularly, the process and apparatus of the invention can use crumbled powders, briquettes, pellets, having a size or grading only limited by the mechanical conveying ability.


- 25 The resulting product is a so-called "weak" gas, having a chemical composition and a flow rate depending on the fuel used, and capable of being used to different purposes, such as direct combustion for heating air, water or other desired fluid, or in the production of overheated steam for operating a turbine, or for operating a gas turbine or an internal combustion engine. It could also be
30 used as a starting material in the chemical industry (synthesis of ammonia, methanol, etc.).

CLAIMS

1. A process for treating solid fuel materials, such as contaminated biomass and solid city waste, and converting them into a synthesized gas, comprising: a fuel gasification step carried out in a co-current gasogen and in which a fraction of the fuel materials undergoes combustion with an oxidant and the heat developed in the combustion is exploited for gasifying the remaining material; and a cinders separation, extraction and purification step, characterized in that
 - cinders are separated and removed from the fuel material after it has undergone the partial combustion and before it has been gasified;
 - cinders are then purified and collected after eliminating from it any remaining fuel material through complete combustion;
 - the fuel material which has undergone the gasification step without being fully converted to gas (CO) is recirculated by mixing it to fresh material before the latter is submitted to combustion.
2. The process for treating solid fuel materials according to claim 1, characterized in that the combustion gas, particularly CO₂, as developed during cinders purification, is mixed to the oxidant used for the combustion of a fraction of the fuel material.
3. The process for treating solid fuel materials according to claim 1, characterized in that the oxidant is heated to a temperature higher than 400° by means of a fraction of the available heat contained in the synthesized gas flowing at a high temperature from the gasogen, before conveying it to support the combustion of a fraction of the fuel material.
4. The process for treating solid fuel materials according to claim 1 or 3, characterized in that the oxidant includes a proportion of overheated steam.
5. The process for treating solid fuel materials according to one of claims 1 to 3, characterized in that the oxidant is fed to the gasogen under pressure.
6. The process for treating solid fuel materials according to one of claims 1 to 5, characterized in that plain air is used as an oxidant.

7. The process for treating solid fuel materials according to one of claims 1 to 5, characterized in that air enriched with oxygen is used as an oxidant.
8. The process for treating solid fuel materials according to one of claims 1 to 5, characterized in that pure oxygen is used as an oxidant.
- 5 9. The process for treating solid fuel materials according to claim 1, characterized in that filter dust recovered in filtering the synthesized gas is added to the cinders, after separation and removal and before purification, so that the filter dust undergoes the same purification process.
10. An apparatus for carrying out the process of claim 1, comprising a vertical, co-current gasogene (1) having an annular combustion area (11) for the combustion of a fraction of the fuel material, where the oxidant is fed to both its inner and its outer sides, and a gasification chamber (12) for gasifying the remaining fuel material, the gasification chamber also being vertical and being located above and downstream of the combustion area (11) in the direction of
15 fuel material displacement, characterized in that
- the floor of the gasification chamber (12) has a device (16, 19, 5, 6) for separating and removing cinders, comprising a port (19) feeding the cinders and the accompanying fuel material, through a feeding channel (6), to a scorification chamber (3), where the accompanying fuel material is completely burned and
20 transformed into CO₂, while the cinders are collected, after purification, in a cinder tank
- a recirculation device (17, 18, 8), located at the top of the gasification chamber (12) for recirculating the material which has undergone the gasification step without being completely transformed into the synthesized gas (CO), comprises
25 a rotating material distributor in form of shovels (17), the recirculation device conveying the recirculating material to an outlet aperture (18) leading into a pipe (8) which feeds the recirculating material to a duct (7) for the supply of fresh fuel material, where the fresh fuel material is mixed with the recirculating material before being introduced into the gasogen (1) as a fuel mixture.
- 30 11. The apparatus of claim 10, characterized in that the vertical co-current gasogen (1) comprises a rotating vertical auger (10) feeding the material upwards in the annular combustion area (11).

12. The apparatus of claims 10 or 11, characterized in that the recirculating device (17, 18, 8) feeds the recirculating fuel material to a feeding duct (7) for the fresh fuel material, which is provided with a first, substantially horizontal auger, where the fresh material is mixed with the recirculating material, and
5 which in turn feeds the mixture of fresh fuel material and of recirculating material, as fuel, to the vertical auger (10) of the gasogen (1) through a second substantially horizontal auger (9) opening into the vertical shell of the vertical auger (10) of the gasogen (1).
13. The apparatus of claim 10, characterized in that the cinder separation and removal device (16, 19, 5, 6) comprises a distributor unit (16) for distributing, conveying and aerating the material which collects on the floor of the gasification chamber (12), the distributor unit comprising one or more horizontal shovels (16) which rotate around a vertical gasogen axis, the shovels being oblique to the floor plane, so that they sweep a radial chamber extending for the entire length
15 of the shovels (16) and having the function of smoothly distributing the combustion gas over the entire cross-section of the gasification chamber (12) whilst avoiding preferential gas flowing channels.
14. The apparatus of claim 10, characterized in that the scorification chamber (3) comprises a rotating vertical auger (23) which is supplied with cinders and with
20 accompanying fuel material through a substantially horizontal auger (6) opening in the vertical shell of the auger (23) of the scorification chamber (3) and in that the purification of the cinders takes place by way of combustion of the accompanying fuel material in an annular combustion chamber (24) located in the upper portion of the auger (23) of the scorification chamber (3), and supplied
25 with oxidant at least at one of the annular peripheries of the combustion chamber.

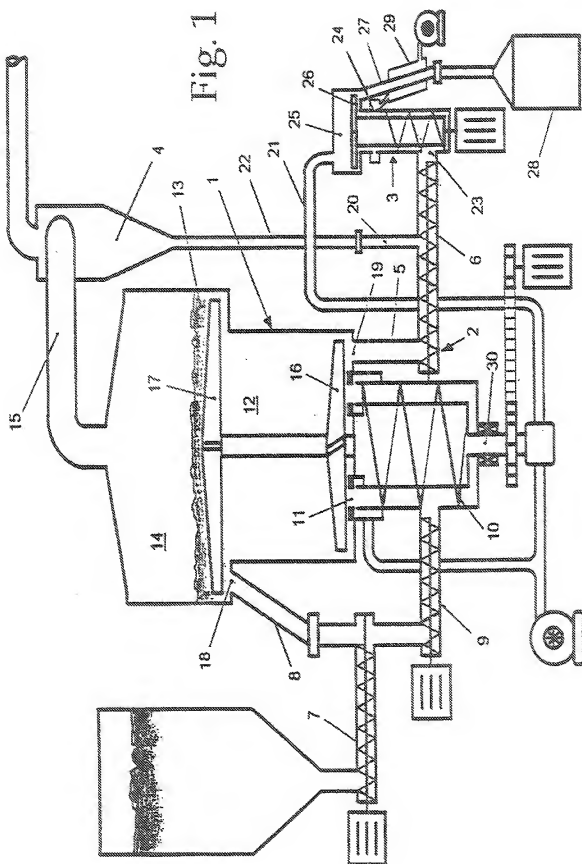

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C10J3/02 C10J3/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C10J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 309 387 A (MICHEL-KIM) 29 March 1989 see page 5-6; claims 1-24	1,10
A	EP 0 565 935 A (PORETTI-GAGGINI) 20 October 1993 cited in the application see page 9-11; claims 1-12	10
A	DE 27 29 764 A (DAVY BAMAG) 4 January 1979 see page 10, paragraph 2 - page 11, paragraph 2 see page 1-2; claims 1-6	1,2
A	DE 557 986 C (CHAPMAN) 31 August 1932 see the whole document	10

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

Date of the actual completion of the international search

22 March 1999

Date of mailing of the international search report

31/03/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel: (+31-70) 340-2040, Tx: 31 851 apo nl,
Fax: (+31-70) 340-3016

Authorized officer

Wendling, J-P

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Bionaf Application No

PCT/IB 99/00001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 309387 A	29-03-1989	DE 3732867 A	06-04-1989
		AT 62926 T	15-05-1991
		JP 1108297 A	25-04-1989
		JP 1907254 C	24-02-1995
		JP 6031341 B	27-04-1994
		US 4987115 A	22-01-1991
		US 5089030 A	18-02-1992
EP 565935 A	20-10-1993	CH 685244 A	15-05-1995
		AT 148156 T	15-02-1997
		DE 69307572 D	06-03-1997
		DE 69307572 T	19-06-1997
DE 2729764 A	04-01-1979	NONE	
DE 557986 C		NONE	